

480/240/120fps Recording **STANDALONE *Plus* DVR**

Mode	Model	Live / Recording
NTSC	1648	480 / 480fps
	1624	480 / 240fps
	1612	480 / 120fps
PAL	1648	400 / 400fps
	1624	400 / 200fps
	1612	400 / 100fps




16 Channel DVR iMDVRS-1648 / iMDVRS-1624 / iMDVRS-1612

- STANDALONE *Plus*
- Recording Resolution
 - 352x240, 704x240, 704x480(NTSC)
 - 352x288, 704x288, 704x576(PAL)
- MPEG-4/G.726 Compression
- Customizing Type
- Backup & Copy - USB2.0, IEEE1394, SCSI, LAN (Ethernet)
- System Control - Touch pad, Remote controller, Mouse, Network
- Audio Detection / Audio Recording 16CH Input
- Automation by network
- Internal UPS built-in
- Powerful Network Interface
 - PSTN, ISDN, ADSL, Cable Modem, LAN (Ethernet)
 - Automatically detect dynamic-IP / Private-IP / DDNS
 - Multi-Network Interface (Ethernet & PSTN)
- Various Recording Mode
 - Auto, Continuous, Manual, Event (Motion, Sensor, Audio) Recording
- Various Recording Scheduling Configurations
- Multi-Language
- Auto E-mailing / Calling Service
- Remote Access Software / Web Monitoring

Specification

480/240/120fps Recording **STANDALONE Plus DVR**

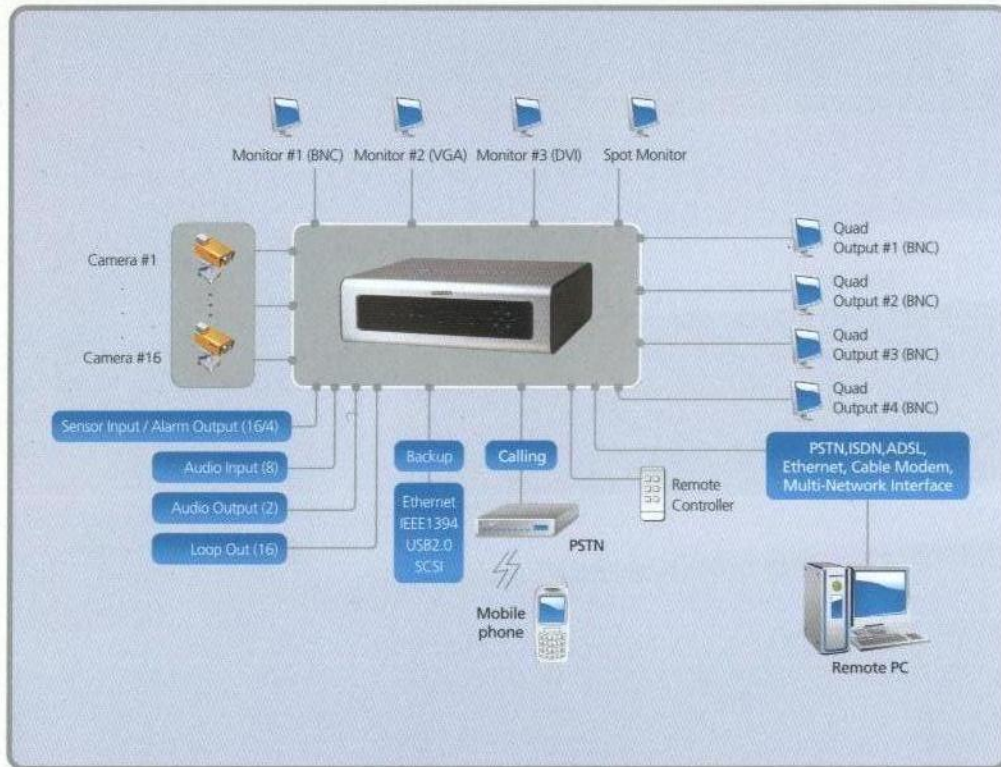

Video Input/Output	Camera Input - 16 BNC Monitor Output - 1 BNC, 1VGA, 1DVI Loop Output Quad Output Spot Output - 1 BNC
Audio Input / Output	Audio Input - 16RCA Audio Output - 2 RCA (1 Line out, 1 Speaker out)
Recording Resolution	352x240, 704x240, 704x480 (NTSC), 352x288, 704x288, 704x576 (PAL)
Recording Frame Rate	iMDVRS-1648 - Max.480fps - NTSC, Max.400fps - PAL iMDVRS-1624 - Max.240fps - NTSC, Max.200fps - PAL iMDVRS-1612 - Max.120fps - NTSC, Max.100fps - PAL
Compression	Video - MPEG4, Audio - G.726
Display Mode	Live - 1/4/6/8/9/10/13/16/Sequence, Playback - 1/4/9/16
Control Input / Output	Sensor Input - 16, Relay Output - 4
System Control	Front Touch Button, Remote Controller, Mouse, Network
HDD Bay	6 (Max.2TERA)
Backup / Copy Interface	Ethernet, IEEE1394, USB2.0, SCSI
Network Interface	PSTN / ISDN / Ethernet / Cable Modem / ADSL Automatically Detect Dynamic-IP / Private-IP / DDNS Multi-Network Interface (Ethernet & PSTN)
PTZ/ATM/POS interface	RS485, RS422, RS232C
Software Upgrade	RS232C (Serial), Ethernet, USB Memory Stick
Specific Features	Audio Detection Auto E-mailing / Calling Service Dual Monitor (Simultaneous Live / Playback Display)
Remote Access	Remote Access Software / Web Monitoring
Power	Internal UPS, 110V/220V, 50Hz/60Hz
Operating Temperature	0 ~ 40°C
Weight	11kg
Dimensions	430x140x430 (WxHxD) (mm)